

11 Ways Multi Tariff Metal Consumer Unit with T2 SPD, 2 x 100A Main Switch & 1 x 63A Main Switch

- 18 module metal enclosure
- 11 ways available
- 2 x 100A main switch
- 1 x 63A main switch
- 1 x T2 20-40kA SPD
- Include tail clamp for incoming live and neutral tails



General information

Mounting method	Surface mounted
Number of modules	18
Number of available modules	11
Number of rows	1
Barcode (EAN-13)	5060690136095

Technical information

Standard	BS EN 61439-3
Number of phases	Single phase
Rated current (I_{nA})	[A] 100
Rated operational voltage (U_e)	[V] 230
Type of current	AC
Frequency (f)	[Hz] 50
Rated insulation voltage (U_i)	[V] 500
Rated impulse withstand voltage (U_{imp})	[kV] 4
Rated short-time withstand current (I_{cw})	[kA] 10
Rated conditional short-circuit current (I_{cc})	[kA] 16
Overvoltage category	III
Pollution degree	2
Location type	Indoor
Altitude	[Meter] < 2000
Ambient air temperature for operation	
• Minimum	[°C] -5
• Maximum	[°C] +40
Ambient air temperature for storage	
• Minimum	[°C] -40
• Maximum	[°C] +75
Degree of protection (IP)	IP2XC
Degree of protection (IK)	IK07

Danson Electrical UK Limited.

E-MMT18442/SPD1

Enclosure material	Steel
Surface finish	Powder paint
Colour	Fresh white
RAL colour number	9016
Information for incomer device	
Type	Switch disconnecter
Standard	BS EN 60947-3
Number of poles	1P+N
Neutral position	Neutral right
Incomer device 1	
Product code	E-DM24
Rated current (I_n) [A]	100
Incomer device 2	
Product code	E-DM24
Rated current (I_n) [A]	100
Incomer device 3	
Product code	E-DM22
Rated current (I_n) [A]	63
Information for surge protection	
Surge protection	Yes
Standard	BS EN 61643-11
Product code	DS251N2R
Test class	II
Network configuration	1P+N (1+1)
Maximum continuous operating voltage (U_c) [V]	275
Norminal discharge current (8/20 μ s) (I_n) [kA]	20
Maximum discharge current (8/20 μ s) (I_{max}) [kA]	40
Voltage protection level (U_p) [kV]	< 1.3 (L-N) , < 1.5 (N-PE)
Response time [ns]	< 25
Maximum backup fuse [A]	125 gL
Integrated with remote indication contact	Yes

Connection information

	Connection capacity [mm ²]	Torque [N.m]
Terminal bar	16	1.7
Main switch	35	2.5
SPD	16	2
Cover screws	/	2

Package information

Package level 1	
Type	Box
Number of units in package level 1 [pcs]	1


E-MMT18442/SPD1

Weight	[kg]	4.9
Length	[cm]	384.4
Width	[cm]	269.7
Height	[cm]	128.3
Package level 2		
Type		Pallet
Number of units in package level 2	[pcs]	90
Weight	[kg]	456
Length	[cm]	120
Width	[cm]	100
Height	[cm]	125

Knock-outs & dimensions

		Top face	Bottom face	Left side	Right side	Rear face
d1 = 32 mm	○	2	2	1	1	-
d2 = 25 mm	○	-	-	-	-	-
d3 = 20 mm	○	7	7	-	-	-
A = 40 mm, B = 30 mm	□	-	-	-	-	-
A = 104 mm, B = 52 mm	□□	-	-	-	-	2

Width	Height	Depth	X hole	Y hole	Weight
[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
380	264	115.3	310	175	4.57

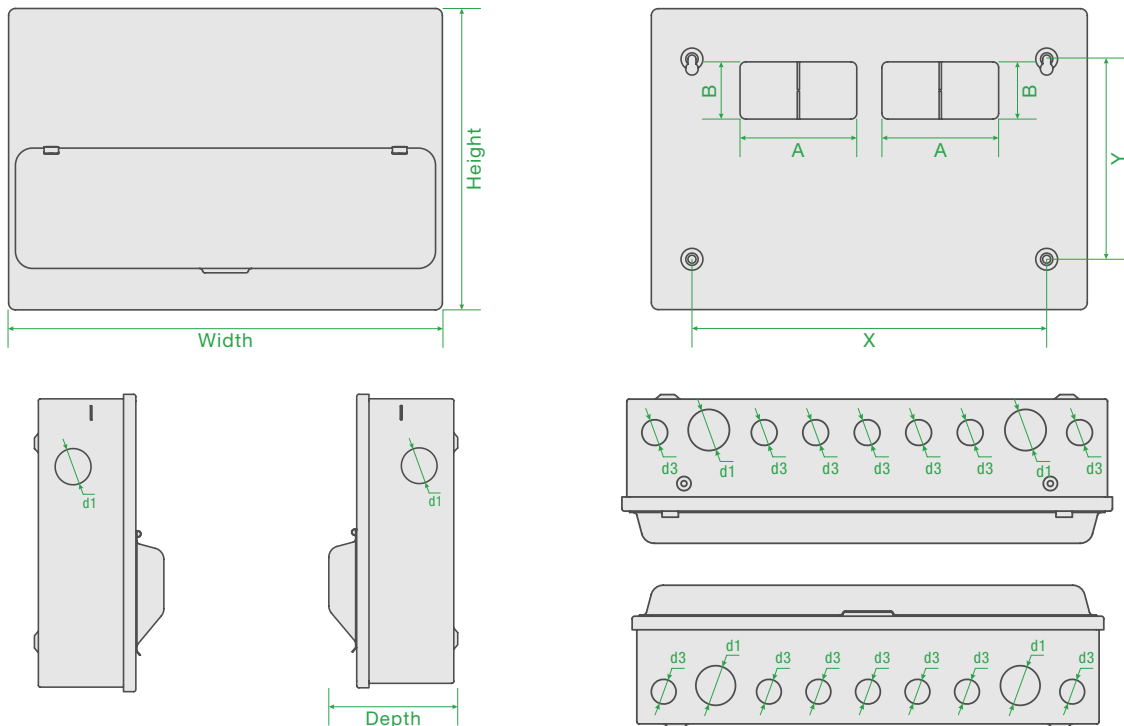

Certificate

